


Lutz Flow meter TR-Series

Quick, easy and precise

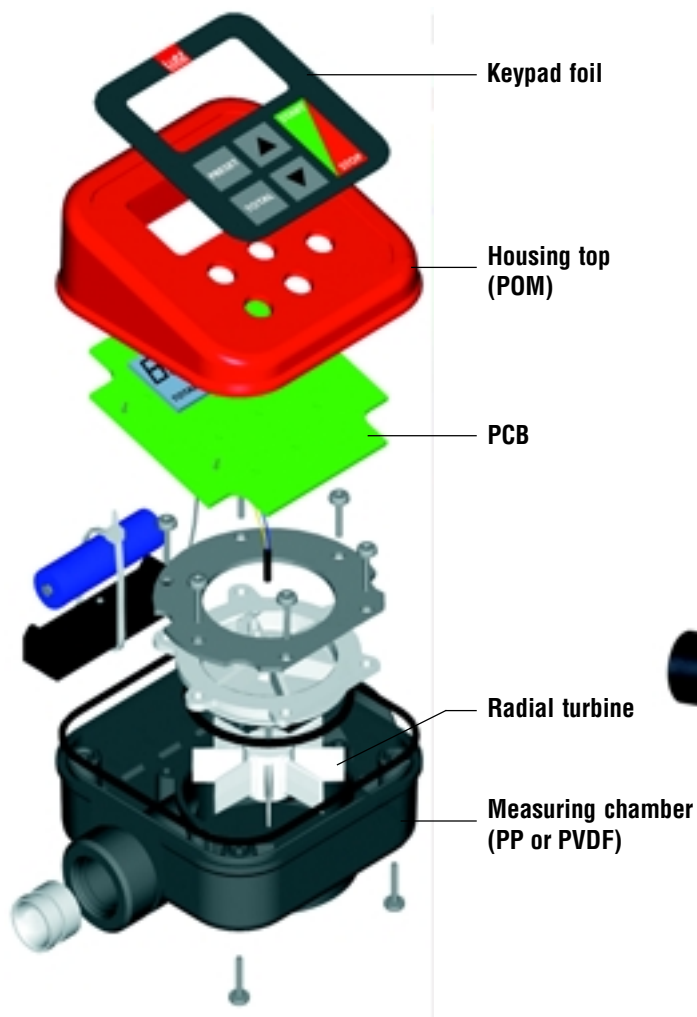

The Lutz TR Series flow meter offers a new standard in precision and reliability, eliminating waste and improving efficiency. The compact design ensures ease of handling and trouble free installation.

Features:

- Chemical resistance against corrosive and aggressive liquids
- Easy calibration
- Proven radial turbine technology
- Totalizer function
- Light weight, compact design with rotatable (90°) display
- For all drum and container pumps



Model		TR50-PP	TR120-PP	TR120-PVDF
Material	housing top	POM	POM	POM
Material (in contact with the medium)	measuring chamber	PP	PP	PVDF
	turbine	PP	PP	PVDF
	shaft	HC-4 (2.4610)	HC-4 (2.4610)	HC-4 (2.4610)
	seal	Viton®	Viton®	Viton®
Range of measurement	GPM	2.5 to 10	5 to 32	5 to 32
Range of viscosity	cps	1-20	1-20	1-20
Maximum pressure	PSI	30 (at 68 °F)	30 (at 68 °F)	30 (at 68 °F)
Connection*		3/4	1 1/4	1 1/4
Temperature range	°F	18 to 86	18 to 86	18 to 104

*1" MNPT PP fittings available.

Viton® is a registered Trademark of DuPont Dow Elastomers.