

+GF+ SIGNET 5800CR ProPoint™ Conductivity/Resistivity Monitor



Description

The +GF+ SIGNET 5800CR Conductivity/Resistivity Monitor is equipped with a scaleable 4 to 20 mA output and two programmable relays for simple and convenient process control and monitoring. Temperature is selectable for display in either °C or °F, and compensation is automatic and programmable (meets USP requirements). The monitor requires

12 to 24 Volts, AC or DC, and can be used with the +GF+ SIGNET Conductivity Sensors listed below. The four-button keypad arrangement with intuitive software design is user-friendly, and the NEMA 4X/IP65 integrity of the front panel can be extended to the entire enclosure by using the optional Rear Cover Kit.

Features

- Display units: μS , mS, k Ω , M Ω , PPM (TDS)
- Temperature Compensation
- Two Programmable Relays
- Meets USP Requirements
- Dual Proportional Control Capability
- Scaleable 4 to 20 mA Output
- Analog and Digital display
- Backlit LCD
- Simple push-button operation
- Intuitive Software
- Non-volatile memory
- Versatile low voltage power requirement
- 1/4 DIN, NEMA 4X/IP65 enclosure
- Hard-coated, High Impact & UV resistant polycarbonate front face


Application

- Water Quality Monitoring
- Reverse Osmosis
- Demineralizer Regeneration and Rinse
- Cooling Tower & Boiler Protection
- Chemical Concentration
- Rinse Tanks
- Desalinization
- Artificial Saltwater Production
- Aquatic Animal Life Support Systems
- Aquaculture
- Environmental Studies

Options




Technical Features

Pro-Point Family Features

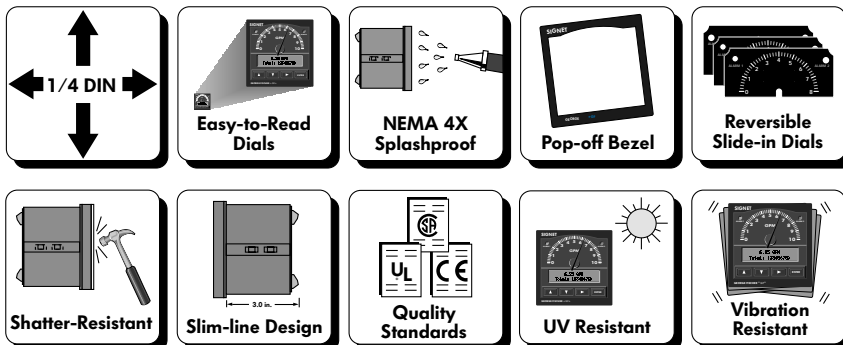


Conductivity /Resistivity Monitor	Conductivity Sensor Options				
	2819	2820	2821	2822	2823
5800CR	●	●	●	●	●


Dimensions

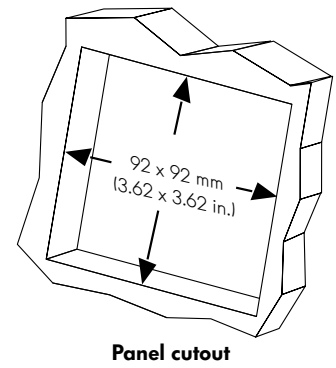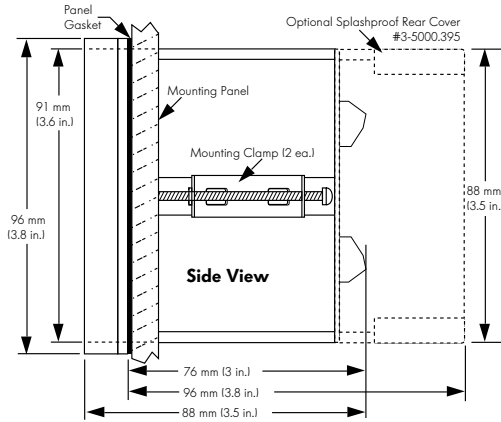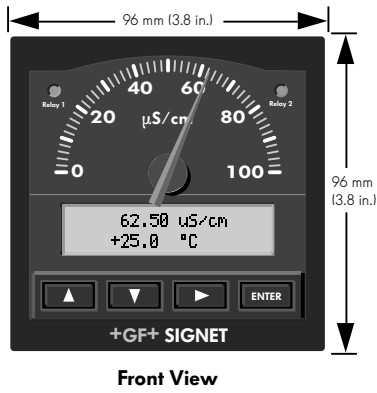


Installation




- Panel mount (standard)




- Optional 5 x 5 inch adapter plate for Signet retrofit (3-5000.399)




- Optional surface mounting bracket (3-5000.598)




- Optional splashproof rear cover kit (3-5000.395)



- Liquid-tight connector kit - 3 sets (3-9000.392)




- Optional heavy duty wall mount bracket (3-0000.596)



- Optional 200 retrofit adapter (3-8050.392)

- The front panel provides NEMA 4X splashproof protection.
- Standard 1/4 DIN panel cutout
- 76 mm (3 in.) mounting depth including rear terminals
- Optional splashproof rear cover kit with knockout ports for cable access.
- 96 mm (3.8 in.) mounting depth with optional splashproof rear cover installed
- Up to 30 m (100 ft.) max. cable length between sensor and instrument. Up to 7.6 m (25 ft.) max cable length for measurements from 10 MΩ to 18 MΩ (0.055 μS to 0.1 μS).

Rear Terminal View

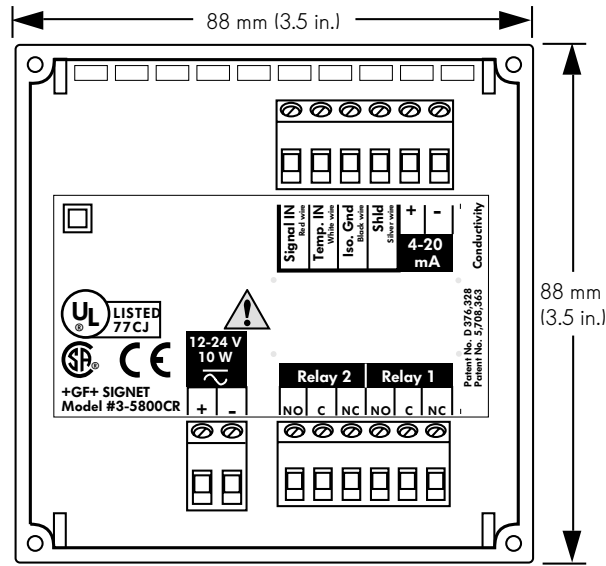

Rear View

Technical Data

General

Operating Range:

Conductivity: 0.055 to 400,000 $\mu\text{S}/\text{cm}$
 Resistivity: 10 $\text{k}\Omega/\text{cm}$ to 18.2 $\text{M}\Omega/\text{cm}$ (0.055 to 100 $\mu\text{S}/\text{cm}$)
 (Solution temperature must be greater than 20°C for Resistivity above 10 $\text{M}\Omega$)

Power Requirements:

Temperature: 0 to 100°C (32 to 212°F) using PT-1000
 12 to 24 Volts, AC or DC, unregulated, 50 to 60 Hz, 10W max.

Display:

Analog: Reversible dials: 0 to 2, 4, 6, 8, 10 and 100
 Digital: Backlit LCD, 2x16 alphanumeric character

Current Output:

4 to 20 mA, non-isolated, internally powered
 Loop impedance: 350 Ω max. @ 12V, 950 Ω max. @ 24V
 Accuracy: $\pm 0.1\%$

Alarm Contacts:

Two SPDT relays: 5A @ 30VDC, 5A @ 125VAC, or 3A @ 250VAC max.
 High/Low/Pulse programmable with adjustable hysteresis
 Dual Proportional Control Capability

Temperature Comp.:

Programmable 0 to 10% per °C

TDS Conversion Factor:

Programmable 0.00 to 3.00 $\mu\text{S}/\text{ppm}$ (default 2.00)

Accuracy:

$\pm 2\%$ of reading

Materials:

Enclosure: ABS Plastic, NEMA 4X/IP65

Keypad: Silicone Rubber

Panel and case gasket: Neoprene

Window: Hard-coated polycarbonate

Immunity:

EN50082-1

Emissions:

EN55011

Safety:

EN61010-1

Environmental

Operating temperature:

-10 to 55°C (14 to 131°F)

Relative humidity:

0 to 95%, non-condensing

Standards and Approvals

- CE, CSA, UL
- Manufactured under ISO 9001

Description

Mfr. Part No.

3-5800CR

Code

198 825 005

Description

Conductivity/Resistivity Monitor

- Reversible dial face kit included (0-2, 4, 6, 8, 10, 100)
- Assorted unit/multiplier decals included

Accessories

Mfr. Part No.

3-5000.395

3-9000.392

3-5000.399

3-5000.598

3-8050.392

3-0000.596

3-5000.390

3-5000.525-1

3-5500.390

3-5500.611

3-5000.398

3-8050.396

3-5000.397

Code

198 840 227

159 000 368

198 840 224

198 840 225

159 000 640

159 000 641

159 000 323

159 000 328

159 000 347

198 840 230

159 000 646

159 000 617

159 000 326

Description

Splashproof rear cover kit

Liquid-tight connector kit for rear cover (includes 3 connectors)

5 x 5 inch adapter plate for +GF+ Signet retrofit

Surface mount bracket

Model 200 retrofit adapter

Heavy duty wall mount bracket

Installation kit

Bezel, 5000 series

Dial kit

Unit tags

Protective Overlay kit (10 pcs)

RC Filter kit (for relay use)

5000 Series Window

Engineering Specifications for +GF+ SIGNET 5800CR Conductivity, Resistivity and TDS Monitors

- Sealed to NEMA 4X/IP65.
- Manufactured under ISO 9001 certified processes, and shall meet USP requirements.
- Programmable with front panel keys for calibration, to set conversion factors, and to select display functions.
- Analog indicator which shall accept replaceable dial faces, provided by the manufacturer, to display a variety of engineering units in ranges including: 0-2; 0-4; 0-6; 0-8; 0-10; and 0-100 with multiply or divide by indication.
- Analog display accuracy shall be $\pm 1\%$ of digital reading.
- Backlit 2 x 16-character alphanumeric LCD display.
- 4 to 20 mA non-isolated, internally powered two wire current loop output.
- Two SPDT relays.
- +GF+ SIGNET, Model 5800CR Conductivity/Resistivity Monitor.

Engineering Specifications for +GF+ SIGNET 5800CR Conductivity Monitor

- CSA, UL and CE standards, including EN50082-1 requirements for electromagnetic immunity, EN55011 requirements for electromagnetic emissions, and EN61010-1 for safety.
- Input shall accommodate compatible sensor signals corresponding to conductance from 0.055 μS to 400,000 μS .
- Programmable temperature compensation from 0% to 10% per $^{\circ}\text{C}$, or alternatively may be programmed for no temperature compensation.
- Compatible with the +GF+ SIGNET 3-28XX-1 series conductivity sensors.

Engineering Specifications for +GF+ SIGNET 5800CR Resistivity Monitor

- CSA, UL and CE standards, including EN50082-1 requirements for electromagnetic immunity, EN55011 requirements for electromagnetic emissions, and EN61010-1 for safety.
- Accommodate compatible sensor signals corresponding to resistance from 10 $\text{K}\Omega$ to 18.2 $\text{M}\Omega$ in solutions from 20 to 100 $^{\circ}\text{C}$.
- Automatic temperature compensation from 0% to 10% per $^{\circ}\text{C}$, or alternatively may be programmed for no temperature compensation.
- Compatible with the +GF+ SIGNET 3-2819-1 series resistivity sensors.

Engineering Specifications for +GF+ SIGNET 5800CR TDS Monitor

- CSA, UL and CE standards, including EN50082-1 requirements for electromagnetic immunity, EN55011 requirements for electromagnetic emissions, and EN61010-1 for safety.
- Accommodate compatible sensor signals corresponding to parts per million (ppm) of Total Dissolved Solids (TDS) from 0.027 ppm (TDS) to 200,000 ppm (TDS).
- Programmable temperature compensation from 0% to 10% per $^{\circ}\text{C}$.
- Compatible with the +GF+ SIGNET 3-28XX-1 series conductivity sensors.